

[Http://www.innosolarenergy.com](http://www.innosolarenergy.com)

**InnoSolar**<sup>®</sup>

2017

Let The Sun Power Up Our life  
[Http://www.innosolarenergy.com](http://www.innosolarenergy.com)

## STORAGE TANK



Innosolar Energy Co., Ltd.

Web: [www.innosolarenergy.com](http://www.innosolarenergy.com)  
Email: [sales@innosolarenergy.com](mailto:sales@innosolarenergy.com)



## COMPANY PROFILE ▶▶▶

Innosolar Energy Co., Ltd. is a leading manufacturer of solar heating products. We have office in both Nanjing, China and Perth, Australia. With dedication of our team, INNOSOLAR is involved in design & producing of top quality solar water heaters.

INNOSOLAR focus on the business of exporting only and our products are 100% exported. Moreover, Integrated with a high quality control system of ISO9001, INNOSOLAR has a perfect system including material sourcing, producing, quality control, logistic, co-working design with customer. We believe that a perfect control system is the key to customer value adding and also a key to our success.

### For the storage tanks

☞ We supply high quality but reasonable price

Enameling tank


Stainless steel tank

We are looking for partners all over the world. We still believe that only long-run business cooperation will make value to us. And if you are also interested, please contact us to power up our lives with solar together.

## SYSTEM




### Roof mount system

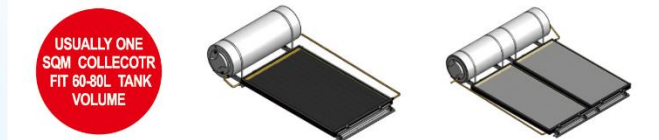

Tank Capacity	200L	300L
<b>General Info</b>		
Type	Roof-mount	Roof-mount
Tank Dimension	Dia 438mm, length 1570mm	Dia 600mm, Length 1870mm
Collector Nr.	1	2
Collector Gross Area (m <sup>2</sup> )	2.5	4
Back-up heater power	2.4KW	2.4KW
Power supply	220V, 50HZ	220V, 50HZ
Warranty	5 years	5 years
Max working pressure	0.75mPa	0.75mPa
T&P relief pressure	0.85 mPa	0.85mPa
<b>Tank Info</b>		
Item No.	INNO-TC-WS-200L	INNO-TC-WS-300L
Number of tank	1	1
Inner tank material	enameling on BTC 340R	enameling on BTC 340R
Inner tank thickness	2.5mm	2.5mm
Insulation material & thickness	PU/50mm	PU/50mm
Magnesium rod	one pcs	one pcs
In/out connector	G3/4"	G3/4"
High temperature protection	80℃	80℃
Back-up heater control	Robertshaw	Robertshaw
Weight-empty (Kg)	70	90
Weight-full (Kg)	270	290

Installation Dimension

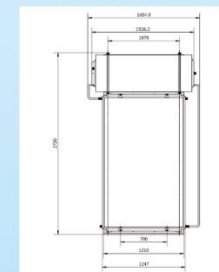

Installation Dimension

